

A NATURAL MIXTURE OF LIMESTONE AND QUARTZITE IN AN ELEGANT AND MODERN STYLE.



The remarkable EZIGrip tile surface possesses a true Non-Slip property when wet, without compromising the soft, easy, and smooth texture in appearance, touch, and feel when dry. The transformative functionality of these tiles facilitates seamless transitions between multiple areas, making them easy to maintain in the long term and simplifying the selection process with confidence.

It is Easy, It is safe - It is EZIGrip.




























TILE













PEARL 1200x600x10mm

600x600x10mm

600x300x10mm

Name	Product Code	Nominal Size	Finish	Faces	Pc/Box
Mayastone Silk	GP-MA-SLK6030E	600x300	EZIGrip (P4)	18	6
Mayastone Silk	GP-MA-SLK6060E	600x600	EZIGrip (P4)	9	4
Mayastone Silk	GP-MA-SLK12060E	1200x600	EZIGrip (P4)	6	2
Mayastone Pearl	GP-MA-PER6030E	600x300	EZIGrip (P4)	18	6
Mayastone Pearl	GP-MA-PER6060E	600x600	EZIGrip (P4)	9	4
Mayastone Pearl	GP-MA-PER12060E	1200x600	EZIGrip (P4)	6	2

TECHNICAL SPECIFICATIONS					RECOMMENDED APPLICATIONS		
6	Water Absorption (ISO10545-3)	≤ 0.5% (Result 0.06%)	②	Chemical Resistance (ISO10545-13)	PASS (A–LA–HA)	Exterior Wall	V
$\stackrel{\bullet}{\Longrightarrow}$	Breaking Strength (ISO10545-4)	PASS ≥ 1300 N		Stain Resistance (ISO10545-14)	PASS Class 5	Interior Wall	V
*	Modulus of Rupture (ISO10545-4)	PASS ≥ 35 N/MM ²				Residential Floor	\checkmark
	Abrasion Resistance (ISO10545-7)	CLASS 4	*	Slip Resistance (AS/NZS 4586 Appendix A, D)		Commercial Floor #	\checkmark
*	Frost Resistance (ISO10545-12)	PASS		Matt Finish Oil Ramp Wet pendulum	R11 P4	Shade Variation	V3

 $^{\#}$ Subject to local slip resistance regulations for area of use or as recommended by Standard Australia guide HB 198:2014

BRISBANE PHONE: **0418 886 833**






MOSAIC DUE SOON

COZY (A & B)

Sheet Size: 500x675mm





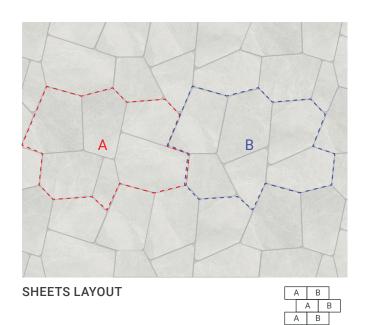

NOVA BRICK

Sheet Size: 300x300mm



SILK



PEARL



SHEETS LAYOUT