



DUNE 600x600 mm EZI Grip

**EZIGRIP**<sup>TM</sup>  
Smooth When Dry Grip When Wet

# JURA

Porcelain Tile




A NATURAL MIXTURE OF  
LIMESTONE AND  
QUARTZITE IN AN ELEGANT  
AND MODERN STYLE.



The remarkable EZIGrip tile surface possesses a true Non-Slip property when wet, without compromising the soft, easy, and smooth texture in appearance, touch, and feel when dry. The transformative functionality of these tiles facilitates seamless transitions between multiple areas, making them easy to maintain in the long term and simplifying the selection process with confidence.

It is Easy, It is safe – It is EZIGrip.

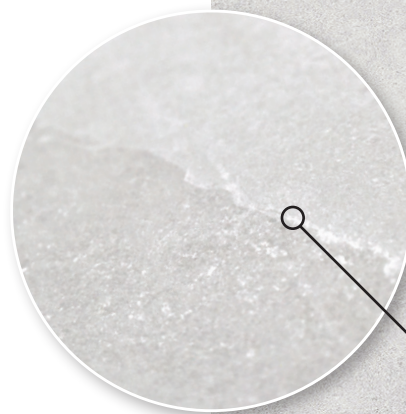

The micro finish add a subtle texture to the tile, providing a low-gloss appearance.












SUNRISE

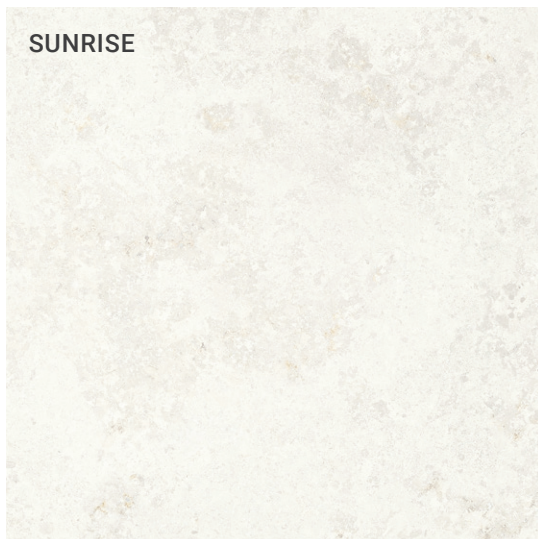


600x600x10mm

DUNE



600x600x10mm

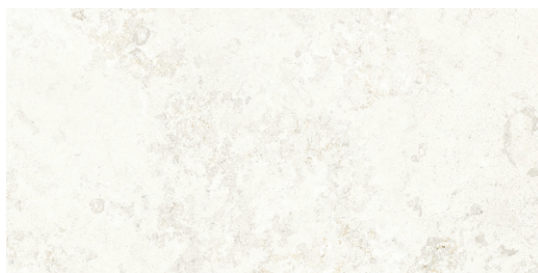

600x300x10mm



600x300x10mm

| Name         | Product Code   | Nominal Size | Finish       | Faces | Pc/Box |
|--------------|----------------|--------------|--------------|-------|--------|
| Jura Sunrise | GP-JU-SRE6030E | 600x300      | EZIGrip (P4) | 18    | 8      |
| Jura Sunrise | GP-JU-SRE6060E | 600x600      | EZIGrip (P4) | 9     | 4      |
| Jura Dune    | GP-JU-DUN6030E | 600x300      | EZIGrip (P4) | 18    | 8      |
| Jura Dune    | GP-JU-DUN6060E | 600x600      | EZIGrip (P4) | 9     | 4      |

| TECHNICAL SPECIFICATIONS                                                           |                                     |                                |                                                                                     | RECOMMENDED APPLICATIONS                           |                   |
|------------------------------------------------------------------------------------|-------------------------------------|--------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------|-------------------|
|  | Water Absorption<br>(ISO10545-3)    | ≤ 0.5%<br>(Result 0.06%)       |  | Chemical Resistance<br>(ISO10545-13)               | PASS<br>(A-LA-HA) |
|  | Breaking Strength<br>(ISO10545-4)   | PASS<br>≥ 1300 N               |  | Stain Resistance<br>(ISO10545-14)                  | PASS<br>Class 5   |
|  | Modulus of Rupture<br>(ISO10545-4)  | PASS<br>≥ 35 N/MM <sup>2</sup> |  | Slip Resistance<br>(AS/NZS 4586 Appendix A, D)     | R11<br>P4         |
|  | Abrasion Resistance<br>(ISO10545-7) | CLASS 4                        |  | <b>Matt Finish</b><br>▪ Oil Ramp<br>▪ Wet pendulum |                   |
|  | Frost Resistance<br>(ISO10545-12)   | PASS                           |  | Shade Variation                                    | V3                |

# Subject to local slip resistance regulations for area of use or as recommended by Standard Australia guide HB 198:2014